



# MB-R700

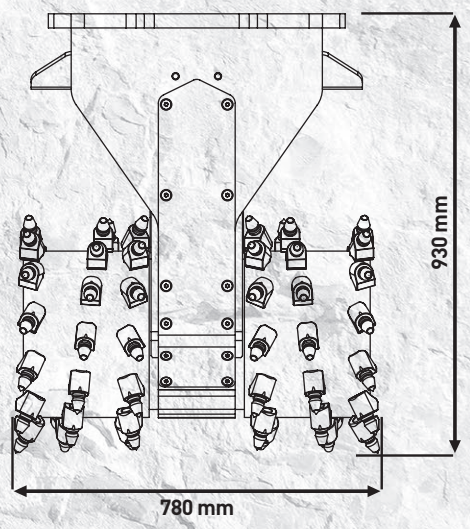

# “Small and efficient”

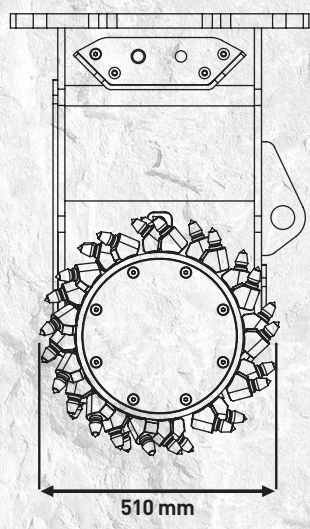

Suitable for any application requiring hard materials to be cut or ground away.

**MB drum cutter MB-R** is suitable for concrete wall and surface profiling, trenching, rock excavation, demolition and dredging and for any use in urban areas and also on restricted jobsites.



## AREAS OF APPLICATION

- DEMOLITION
- REFURBISHMENT
- TRENCHING
- QUARRYING
- EXCAVATING
- SPECIAL FOUNDATIONS
- ROAD BUILDING

## SPECIFICATIONS

RECOMMENDED EXCAVATOR	RECOMMENDED OIL FLOW (MIN)	INLET MAXIMUM PRESSURE	DRAIN-OUT MAXIMUM PRESSURE
≥ 6 < 13 Ton	110-180 l/min.	350 bar	4 bar
OUTPUT TORQUE	PICK FORCE	WEIGHT	SPEED/MIN.
5000 Nm	19600 N	0,6 Ton	80/110 min/max

## ACCESSORIES

RECOMMENDED SPARE PARTS KIT	FIXED COUPLER	QUICK FEMALE COUPLER
MBR700006	FCR700000	MBR700000
<b>24 MONTHS WARRANTY</b>		
WA24R700		

The data provided above is not binding, as the manufacturer reserves itself the right to make improvements to its products at any time and with no advance notice. References to excavator weights are approximate and many may be subject to changes. Consider a 20% tolerance.